




WIPPERMANN

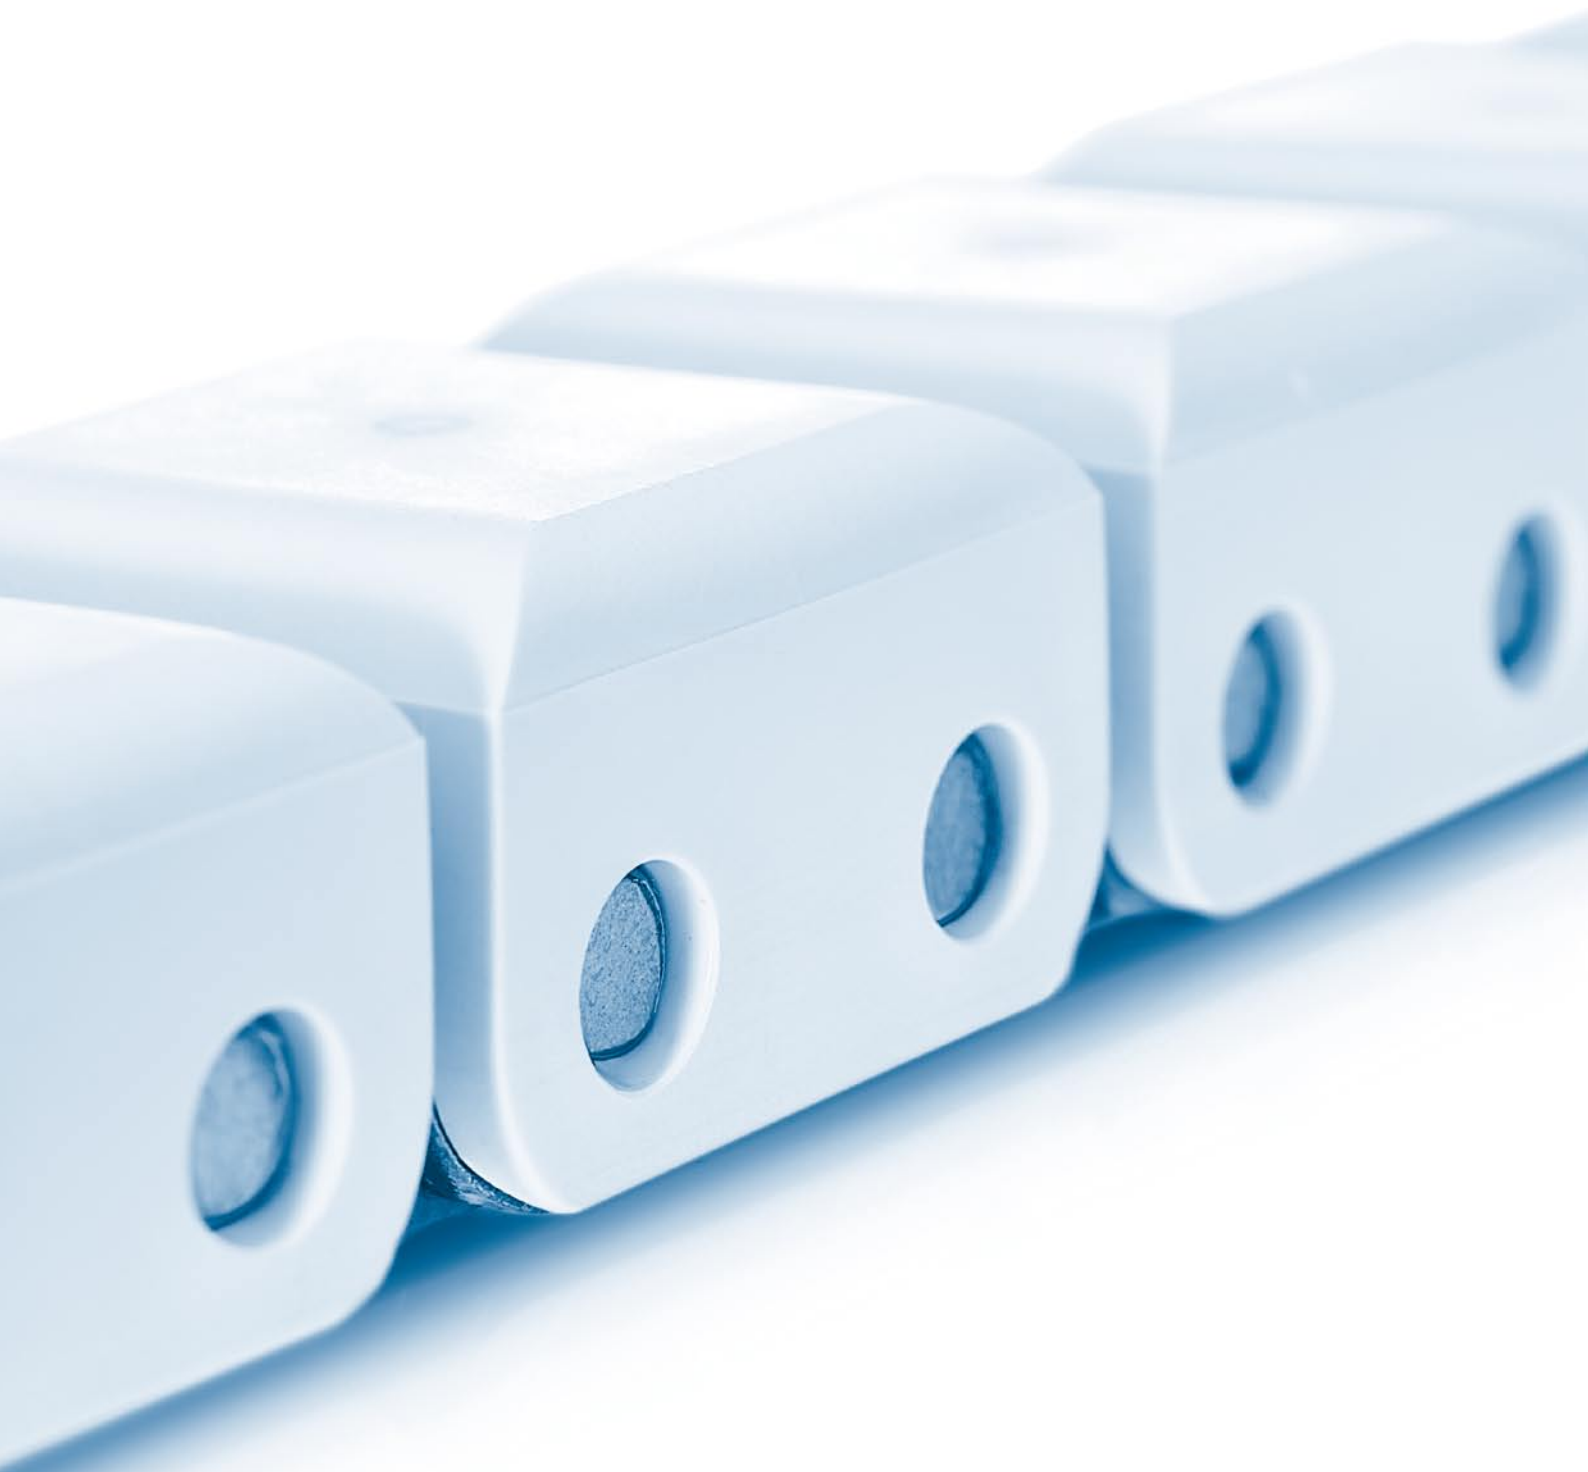

POM-Clips

CAREFUL CONVEYING OF SENSITIVE GOODS




POM-CLIPS



Careful conveying of sensitive goods



POM-Clips for Wippermann chains type series GL (straight sided plates)



- for simplex and duplex roller chains
- for MARATHON and stainless steel chains
- protect sensitive goods from damage by the chain
- easy assembly and replacement
- wear resistant and durable POM
- no edge pressure at transfer points (see picture)
- high load capacity per clip
- black clips for connecting links (mounting without spring clip)

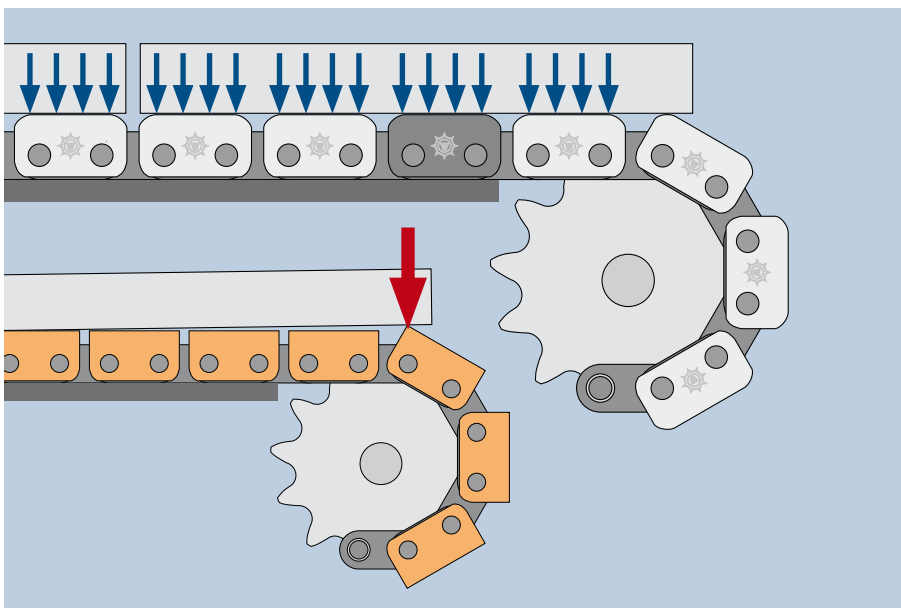

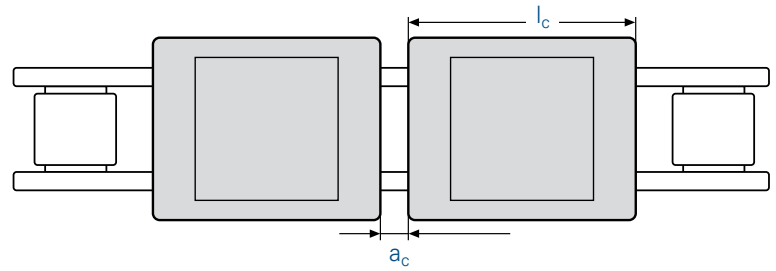

Chain			Plate height						max. vertical load per clip
		DIN	g	a _c	b _c	b _{min}	h _c	l _c	
No.	Ind.	No.	mm	mm	mm	mm	mm	mm	kg
462 GL		08 B-1	11,5	3,5	19,7	22	9,3	21,9	70
D 462 GL		08 B-2	11,5	3,5	33,7	36	9,3	21,9	140
501 GL		10 B-1	14,2	1,55	22,6	25	12,5	30,2	90
D 501 GL		10 B-2	14,2	1,55	39,3	42	12,5	30,2	180
513 GL		12 B-1	15,5	3,9	25,4	28	13,2	34,2	110
D 513 GL		12 B-2	15,5	3,9	45,3	48	13,2	34,2	220
548 GLS		16 B-1	21,0	5,1	40,9	45	18,5	45,7	140
548 GL		works stand.	24,0	6,0	42,0	45	17,5	44,8	140
563 GL		20 B-1	26,5	10,4	47,0	50	23,2	53,4	180

Assembly of the clips at room temperature (> 15°C)

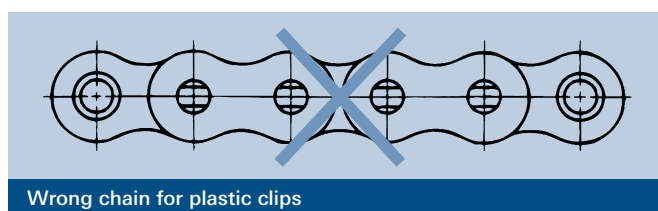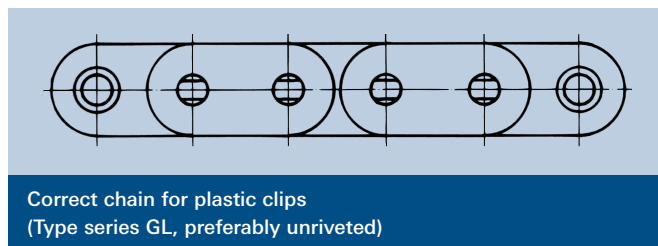

Material POM

- stiff and durable thermoplastic
- impact resistant
- wear resistant
- friction coefficient $\mu = 0,15 \dots 0,3$ (against steel)
- max. sustains temperature 80°C
- food approved
- alkali-proof
- hot-water-proof
- not resistant against strong acids (pH < 4)
- insoluble in many solvents, fuel and mineral oil
- low bulking

Address

Wippermann jr. GmbH
Delsterner Straße 133
58091 Hagen, Germany

Postfach 4020
58040 Hagen, Germany

Phone
Fax

+49 (0) 2331-782-0
+49 (0) 2331-782-356

Homepage
E-mail

www.wippermann.com
info@wippermann.com

